

 **COAST LUBRICANTS  
& INDUSTRIAL SUPPLY**

# **LOCK N LUBE<sup>®</sup>**

## **WHOLESALE CATALOG WINTER 2022**



**TABLE OF CONTENTS**

**END GREASING FRUSTRATION**  
 LockNLube® Grease Couplers .....5


**GREASE GUNS**  
 G.Gun .....6  
 Professional Series Grease Guns.....7  
 Easy-Prime Grease Guns.....8  
 Pneumatic Grease Gun .....9  
 Mini Grease Gun.....9  
 Heavy-Duty Grease Guns.....11

**GREASE BUSTER®**  
 Grease Buster Tools .....12

**ACCESSORIES**  
 In-Line Hose Swivels.....12  
 Adapters for Tight Spaces ..... 14-15  
 Hoses.....17  
 Grease Fitting Sets .....18  
 Other Useful Tools ..... 19-21

**IN-STORE**  
 Store Product Bundles.....22  
 Promotional Materials .....23



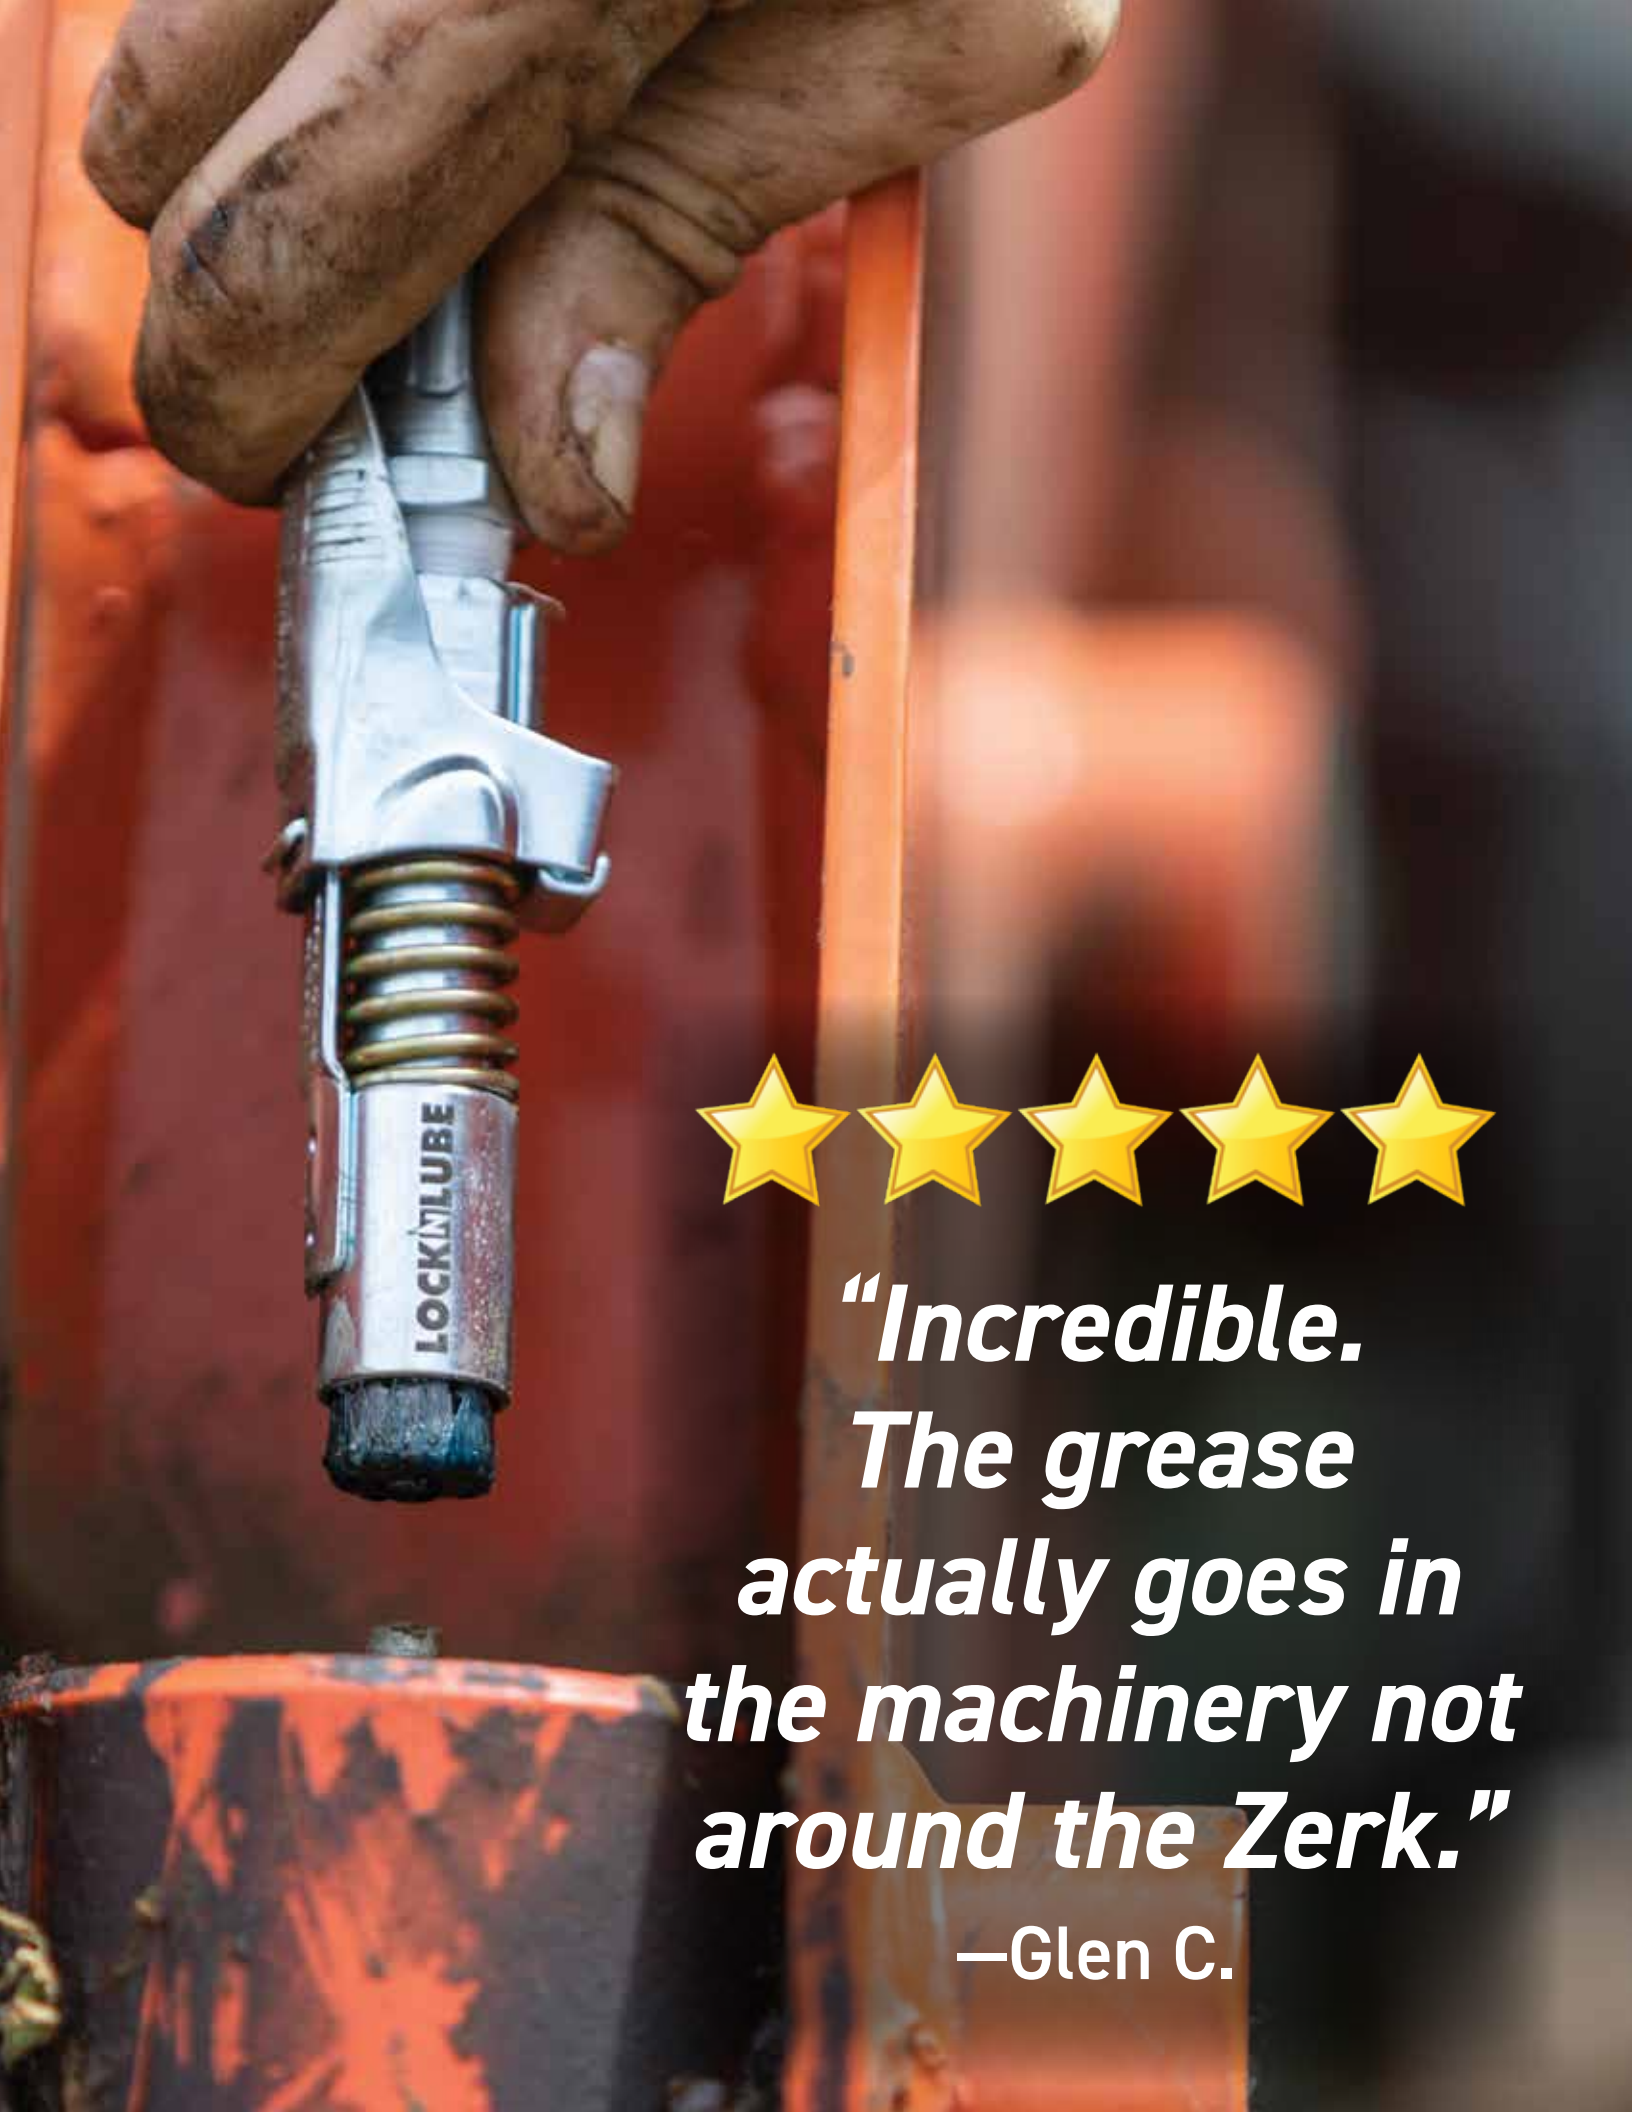

***“Incredible.  
The grease  
actually goes in  
the machinery not  
around the Zerk.”***

**—Glen C.**

**LOCKNLUBE® GREASE COUPLERS & REBUILD KIT**

**GREASE COUPLER**

*The original and still the best,  
LockNLube® Grease Coupler.*



**BEST SELLER**

**GC81011**

*LockNLube® Grease Coupler XL  
Extra reach for recessed grease fittings.*



**GC81042**

DESCRIPTION	SPECIFICATION
Max Pressure	10,000 psi (690 Bar)
Grease Fitting Compatibility	Fits all DIN and SAE specification Zerk fittings (grease nipples)
Coupler Thread	1/8" NPT female thread
Dimensions	<b>Regular:</b> L: 3½ × W: ¾ × H: 1½ in. L: 85 × W: 17 × H: 43 mm <b>XL:</b> L: 5½ × W: ¾ × H: 1½ in. L: 138 × W: 17 × H: 43 mm
Diameter (front coupler)	5/8 inches (16 mm) Fits most recessed Zerk fittings
Weight	<b>Regular:</b> 4 ounces (100 grams) <b>XL:</b> 6 ounces (165 grams)
Grease Gun Compatibility	Works with all grease gun types – pneumatic, manual and electric
Seal	Durable TPU seal for longevity under high pressure
Lock-on Mechanism	Four hardened steel jaws are resilient under high pressure. Patent protected.
Patents	US Patent #8,955,544



**GC81012**

Replace your existing coupler with a LockNLube® Grease Coupler, and End Greasing Frustration!

- Will not leak once locked on. Grease goes in the machine and will clear most clogged fittings.
- Hands-free, does not release under pressure
- Rated up to 10,000 PSI.
- Easy Release thumb lever. Disconnect with ease.
- 1/8" NPT thread. Compatible with all grease guns.
- Works on all grease fittings, SAE and metric.
- Free rebuild kit (GC81012) included with every LockNLube® Grease Coupler.

**G.GUN GREASE GUN**



**GG80004**

DESCRIPTION	SPECIFICATION
Delivery Rate	.09 ounce per stroke
Delivery Pressure	10,000 psi
Grease Capacity	282 ounces, equivalent to twenty 14 oz. tubes of grease
Grease Coupler	Lock-on, heavy-duty, high-pressure LockN Lube® Grease Coupler. Trigger-activated lock-on for max seal to Zerk nipple
Coupler Thread	1/8 inch NPT female
Pump Activation	Foot operated
Pump Mechanism	2-stage, self-priming with pressure return valve
Dimensions	L: 18½" × W: 20¼" × H: 16½" Empty weight = 22 pounds

**The World's Toughest Grease Gun.**

The G. Gun is built for and tested in, the world's toughest environments. It's designed for folks who want regular greasing without endless refilling. The G.Gun eliminates concerns about flat batteries, reduces time and waste spent on refilling and priming. Bulk grease cuts grease costs in half (compared to paper tubes). 10 ft. hose and LockN Lube® Grease Coupler ensure easy, leak-free greasing.

- Develop over 10,000 PSI without batteries
- Patented pressure return valve easily clears back pressure from the hose and returns it to the canister with no mess
- Includes the LockN Lube Grease Coupler, 10 ft. hose and the G.Scoop, to easily and cleanly refill with bulk grease
- Delivers an ounce of grease in 11 strokes. More than 3x more volume than most other grease guns
- Holds over 2 gallons of grease (equivalent to 20 tubes). Cut down on time and waste spent reloading and priming.



*Each G.Gun comes with the G.Scoop: the easiest way to load your G.Gun and move grease.*

**GS30001**



**PROFESSIONAL SERIES GREASE GUNS**



DESCRIPTION	SPECIFICATION
Rated Pressure	10,000 PSI (690 Bar)
Delivery Rate	25 strokes per ounce
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Cartridge Compatibility	14 oz. / 400 g Lipped cartridge
Delivery Hose	20" (500 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 18" x W 6" x H 2 3/4"
Weight	Empty weight 4.2 lbs (1.9Kg)
Pump Activation	Manual hand lever
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel

The Professional Series Lever Grease Gun is the result of years of work and feedback from our customers. We designed this gun to work better than anything out there both for use and storage. The combination of unique features and precision engineering make this the gold-standard for what a lever grease gun can be.

- Unique pressure return system allows for clean and easy disconnect from clogged fittings
- Combo air bleeder valve and Loop & Lock Storage Zerk means clean and easy storage.
- The original patented LocknLube® Grease Coupler, in-line hose swivel and extra-long 20 in hose included
- Locking tab on follower rod for clean, secure storage and use
- Machined Zinc head reduces air pockets and makes reloading and priming easy



DESCRIPTION	SPECIFICATION
Rated Pressure	8,000 PSI (550 Bar)
Delivery Rate	37 strokes per ounce
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Grease Capacity	14 oz. / 400 g Lipped Cartridge or 16 oz. Bulk Fill
Delivery Hose	20" (500 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 15" x W 6" x H 2 3/4"
Weight	Empty weight 3.5 lbs (1.6Kg)
Pump Activation	Manual hand lever
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel

Our professional pistol-grip grease gun combines extreme pressure performance, delivering up to 8,000 PSI, with a lightweight and ergonomic design to reduce fatigue on long days. Compatible with cartridges, bulk grease, or threaded tubes [LNL250 adapter required], this is also one of our most versatile grease guns.

- Rated to 8,000 PSI
- Large, ergonomic grip and lightweight design reduce fatigue
- Handle clip and Loop & Lock Storage design insure clean, easy storage
- Compatible with threaded grease tubes using the LNL250 adapter [sold separately]
- Combo bulk fill & air bleeder port improves priming and bulk filling

## EASY-PRIME GREASE GUNS

Our LockNLube Easy-Prime series is a collaboration with German manufacturer Pressol. These grease guns combine the convenience of using standard grease cartridges with the benefits of a threaded system. By replacing the traditional follower with a reusable plastic follower these guns reduce weight, improve priming, and eliminate messy leaks and drips from the bottom of the gun. Each gun includes 10 reusable followers (SKU: 14900)



**LNL251**

DESCRIPTION	SPECIFICATION
Rated Pressure	10,000 PSI (690 Bar)
Delivery Rate	14 strokes per ounce
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Grease Capacity	14 oz. / 400 g Lipped Cartridge
Delivery Hose	20" (500 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 12" x W 5.5" x H 2 3/4"
Weight	Empty weight 2.2 lbs (1Kg)
Pump Activation	Manual hand lever
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel

- Extreme pressure rated - delivers up to 10,000 PSI
- Variable stroke allows shorter strokes on high pressure applications
- Rolled threads eliminate cross threading and reduce time to attach and remove the barrel
- Delivers more grease per stroke than most grease guns - 1 ounce in 14 strokes
- Plastic follower system reduces weight, cuts down on priming time and issues, and eliminates oil drips and leaks
- Includes LockNLube® Grease Coupler, 20" hose and in-line hose swivel



**LNL254**

DESCRIPTION	SPECIFICATION
Rated Pressure	5,000 PSI (3450 Bar)
Delivery Rate	57 strokes per ounce
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Grease Capacity	14 oz. / 400 g Lipped Cartridge
Delivery Hose	20" (500 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 12" x W 6" x H 2 3/4"
Weight	Empty weight 2.5 lbs (1.13Kg)
Pump Activation	Manual hand lever
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel

- Dual-delivery mode for high pressure (5,000 PSI) or high volume (27 strokes/oz)
- Variable stroke allows shorter strokes on high pressure applications
- Rolled threads eliminate cross threading and reduce time to attach and remove the barrel
- Plastic follower system reduces weight, cuts down on priming time and issues, and eliminates oil drips and leaks
- Includes LockNLube® Grease Coupler, 20" hose and in-line hose swivel

## PNEUMATIC GREASE GUN

Our LNL262 dual-shot pneumatic grease gun is an improvement to the popular LNL261. Now compatible with input pressures up to 120 PSI in single-shot. The heavy-duty construction is built to take a beating and last. The toggle switch makes switching modes easy, even with gloves on. Single shot mode delivers up to 6,000 PSI with a consistent amount of grease per stroke, while continuous mode can deliver up to 5 ounces of grease per minute.




**LNL262**

DESCRIPTION	SPECIFICATION
Rated Pressure	6,000 PSI (single-shot) 2,500 PSI (continuous)
Delivery Rate	5 oz. / min (continuous)
Air Operating Range	40-120 PSI (single-shot), 40-95 PSI (continuous)
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Capacity (oz.)	14 oz. / 400 g Lipped cartridge or 16 oz. Bulk load
Delivery Hose	30" (760 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 18" x W 7 1/2" x H 2 3/4"
Weight	Empty weight 4.2 lbs (1.9Kg)
Pump Activation	Pneumatic Air
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel

- Dual-mode motor offers single-shot and continuous options in one grease gun
- Combo bulk load and air bleeder port to cut down on grease cost and priming issues
- Operating range of 40-120 PSI in single-shot mode
- LockNLube® Grease Coupler, extra-long 30" hose and in-line hose swivel included

## MINI GREASE GUN

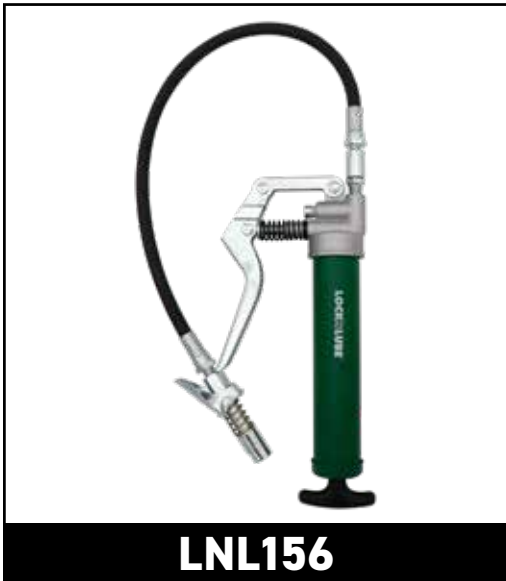

**LNL156**

Small size fits easily into toolbox or storage compartment.

DESCRIPTION	SPECIFICATION
Rated Pressure	3,500 PSI
Capacity (oz.)	3 oz. / 85.1 g Lipped cartridge
Delivery Hose	12" (305 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 11.5" x W 5 1/4" x H 2"
Weight	Empty weight 11 oz.
Pump Activation	Manual hand lever
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel







CAUTION

GREASE FITTING  
INSIDE

LOCK LUBE

# HEAVY DUTY GREASE GUNS

Our “green grease guns” have become famous for delivering world-class performance at an affordable price. Both lever and pistol-grip models include our LockNLube hose assembly (coupler, swivel, whip hose), Loop & Lock storage design, bulk load and air bleeder ports. These grease guns are designed to get the job done. No extra bells and whistles, just the features you need to take the frustration out of greasing. Say goodbye to cheap, disposable grease guns, these are built to last.



**LNL151**

DESCRIPTION	SPECIFICATION
Rated Pressure	10,000 PSI (690 Bar)
Delivery Rate	28 strokes per ounce
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Grease Capacity	14 oz. / 400 g Lipped Cartridge
Delivery Hose	20" (500 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 15" x W 6" x H 2 3/4"
Weight	Empty weight 3.15 lbs (1.42Kg)
Pump Activation	Manual hand lever
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel

- Delivers up to 10,000 PSI
- Includes Loop & Lock Storage System, Bulk Port and Air Bleeder Valve
- 28 strokes per ounce
- Compatible with clear barrel (LNL144)
- Includes LockNLube® Grease Coupler, in-line hose swivel and 20" grease hose



**LNL153**

DESCRIPTION	SPECIFICATION
Rated Pressure	5,000 PSI (3450 Bar)
Delivery Rate	57 strokes per ounce
Grease Compatibility	NLGI consistency numbers 0, 1 and 2
Grease Capacity	14 oz. / 400 g Lipped Cartridge
Delivery Hose	20" (500 mm) DIN1283 nylon braided hose
Hose Thread	1/8" NPT
Dimensions	L 15" x W 6" x H 2 3/4"
Weight	Empty weight 3.95 lbs (1.8Kg)
Pump Activation	Manual hand lever
Includes	Patented LockNLube® Grease Coupler rated to 10,000 PSI and LockNLube Hose Swivel

- Delivers up to 5,000 PSI
- Includes Loop & Lock Storage System, Bulk Port and Air Bleeder Valve
- One-hand operation for speed and convenience
- Compatible with clear barrel (LNL144)
- Includes LockNLube® Grease Coupler, in-line hose swivel and 20" grease hose

**GREASE BUSTER® TOOLS**



**GREASE BUSTER**



**GB17**

**SHOP SIZE GREASE BUSTER**

Open up clogged grease fittings with the Grease Buster®. Simply fill with a solvent and tap the piston with a hammer. Updated design includes textured grip and two o-rings.

<b>Dimensions</b>	L 6½" x W 1" x H 1"
<b>Weight</b>	0.5 lbs (0.226 Kg)



**GB18**

**PNEUMATIC PISTON**

Our pneumatic piston replaces the included Grease Buster piston so that you can use your air hammer for added force and vibration.

<b>Dimensions</b>	L 4¾" x W ¾" x H ¾"
<b>Weight</b>	5 oz (0.15 Kg)



**GB19**

**HOSE EXTENSION**

The 5" Hose Extension replaces the installed Grease Buster coupler to make it easier to reach clogged fittings in tight spaces.

<b>Dimensions</b>	L 6½" x W ⅝" x H ⅝"
<b>Weight</b>	5 oz (0.15 Kg)

**IN-LINE HOSE SWIVELS**

**SWIVELS**

**BEST SELLER**



**LNL231, 231-F & 231-C**

The new LockNLube Hose Swivel is built to withstand up to 10,000 PSI so that you can use it with any grease gun - battery, pneumatic, or hand-pump. Our reinforced design also stands up to lateral pressures that get put on a grease gun hose, not just the pressure of the grease moving through it. Our traditional, and best-selling, 1/8" NPT swivel fits almost every hand grease gun. And now are NEW swivels, engineered to work with your battery grease guns without any adapters. Available in both Fine and Coarse threads.

<b>LNL231</b>	1/8" NPT Standard
<b>LNL231-F</b>	Fine Threads (7/16"-28) For Dewalt® and Lincoln
<b>LNL231-C</b>	Coarse Threads (7/16"-20) For Milwaukee®, Ryobi, Ridgid & Alemite



KOMATSU

LOCK LUBE

**8-PIECE QUICK CONNECT GREASING ACCESSORY KIT**



**BEST SELLER**

Eight quick-connect adapters allow access to hard-to-reach grease fittings. Reach any Zerk on any machine with these 8 adapters. Carrying case includes Velcro strap, grommets for hanging and ripstop nylon for durability.

**Includes**

- Simple 90° Adapter
- Push-On 90° Adapter
- 90° Grease Coupler Adapter
- Narrow Needle Extension
- Grease Injector Needle
- Recessed (Cup) Extension
- Seal-Off Adapter
- Flexible Hose Extension

**Dimensions**

**Open:** L: 10 1/2" x W: 16" x H: 3/8"

**Closed:** L: 10 1/2" x W: 4" x H: 2 1/4"

**Weight**

Empty weight 1.2 lbs (0.55Kg)

**LNL210**

**90 DEGREE ADAPTERS**



**LNL120**

**90° GREASE COUPLER ADAPTER**

A 90 degree adapter for hard-to-reach grease fittings with three hardened steel jaws and rubber seal.

Easily connect and disconnect your grease coupler to the Zerk fitting under the collar of this tool. Gives extended reach and a right angle access to tight spaces.

**Dimensions:** L: 3 3/8" x W: 1 1/2"



**LNL129**

**SIMPLE 90° COUPLER**

Our narrowest right angle adapter. This tool is ideal for small openings or recesses on the machine. Use in confined and narrow spaces where grease fittings are hard to reach.

**Dimensions:** L: 2 1/16" x W: 3/8"



**LNL121**

**PUSH-ON 90° GREASE COUPLER**

Grease hard-to-reach fittings that have a very low overhead clearance. Attach your LockNLube® Grease Coupler to the Zerk fitting in the back then push on from the side to connect to any grease fitting.

**Dimensions:** L: 2" x W: 3/16"

**NARROW ADAPTERS**



**LNL122**

**NARROW NEEDLE NOSE DISPENSER**

This all-around needle adapter gives extra reach for hard-to-reach grease fittings. It snaps directly onto a jaw type coupler to reach grease fittings in very tight spaces.

Tapered tip pushes into ball bearing for connection to grease fittings.

Delivers a fine line of grease for shafts and other applications.

**Dimensions**  
L: 3¼" x W: ⅝"



**LNL128**

**RECESSED FITTING EXTENSION**

A rigid, narrow 5 5/8" extension for your grease coupler. Easily reaches Zerk fittings in recessed or confined areas. Tip has a concave cup shape to give some flexibility when positioning on the top of the Zerk fitting.

**Dimensions**  
L: 5 ⅝" x W: 1¼"



**LNL123**

**GREASE INJECTOR NEEDLE**

Easily grease sealed bearings. Simply insert needle under or through rubber cover to apply grease to bearings. Snaps directly onto a jaw type coupler to reach grease fittings in very tight spaces. Made of 18 gauge steel with protective plastic cover.

**Dimensions**  
L: 3½" x W: ⅜"



**LNL127**

**SEAL-OFF GREASE ADAPTER**

Used for lubricating cars with grease plugs, chainsaw tips, or any other grease plugs or ports that do not have Zerk fittings. The grease fitting in the back of the adapter easily locks into your LockNLube grease coupler so you can quickly attach this adapter when needed.

**Dimensions**  
L: 2 ⅜" x W: ½"



**LNL126**

**QUICK-CONNECT GREASE HOSE ADAPTER**

- Access hard to reach grease fittings with this 12" extension hose
- Includes a heavy-duty 4-jaw grease coupler
- Snaps directly onto a jaw type coupler. Works best with the LockNLube® Grease Coupler
- For hand-operated grease guns



**HOSES AND ADAPTERS**



**LNL271**

**48" UNIVERSAL GREASE HOSE**

Twin spring guards prevent kinks and cracks and ensure safety with cordless grease guns. A heavy-duty hose with 28,000 PSI burst pressure, and still flexible enough to maneuver easily. 7/16"-28 base end threads compatible with Lincoln and DeWalt®. Included adapters ensure compatibility with all cordless grease guns on the market: 7/16"-20 for Milwaukee®, Ryobi and Alemite, and 1/8" NPT for manual grease guns or other brands' cordless models. Working end 1/8" NPT male connection for LockNLube® or other grease couplers. No more brand lock-in.

<b>Working Pressure</b>	10,000 PSI
<b>Length</b>	48"
<b>Thread Type</b>	<b>Working End:</b> 1/8" NPT, compatible with the LockNLube® and all other grease couplers. <b>Base End:</b> 7/16"-28 UNEF. Compatible with brands such as Lincoln and Dewalt®.
<b>Included Adapters:</b>	<b>With O-Ring:</b> 7/16"-28 UNEF (F) × 7/16"-20 UNF (M). Found on brands such as Milwaukee®, Ryobi and Alemite battery-powered grease guns. <b>Without O-Ring:</b> 7/16"-28 UNEF (F) × 1/8" NPT (M). Found on all hand-pump grease guns and common for most other battery-powered grease guns.



- GR88003 5"**
- OS01015 12"**
- OS01016 20"**
- OS01032 30"**

**LOCKNLUBE WHIP HOSES**

- LockNLube whip hoses come in four different lengths, 5", 12", 20" and 30"
- Standard 1/8" NPT male connections
- Working pressure of 6,000 PSI and a burst pressure of over 14,000 PSI
- Chamfered end for best connection compatibility with the LockNLube Magnetic Grease Fitting Relocation Block

**WORKS GREAT WITH OUR MAGNETIC RELOCATION BLOCK FEATURED ON PAGE 19**





**GREASE FITTING SETS**



**LNL140**

**STAINLESS STEEL - 40 pcs - SAE**

Made of 303 stainless steel for marine and other high-corrosion applications.

**Includes**

- 1/4" - 28 SAE LT Straight = 10
- 1/8" - 27 PTF Straight = 10
- 1/8" - 27 PTF 45° Angle = 5
- 1/8" - 27 PTF 90° Angle = 5
- 1/4" - 28 SAE LT 90° Angle = 5
- 1/4" - 28 SAE LT 45° Angle = 5




**LNL141**

**80 pcs - SAE**

The most common 1/8" NPT and 1/4"-28 taper fittings.

**Includes**

- 1/8" - 27 PTF Straight, Qty = 25
- 1/4" - 28 SAE LT Straight, Qty = 15
- 1/4" - 28 SAE LT 45° Angle, Qty = 10
- 1/8" - 27 PTF 45° Angle, Qty = 10
- 1/8" - 27 PTF 90° Angle, Qty = 10
- 1/4" - 28 SAE LT 90° Angle, Qty = 10

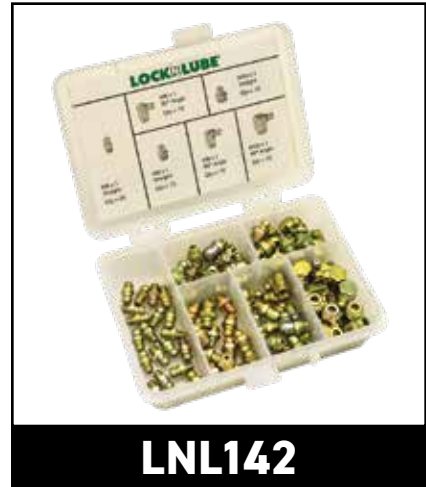

**LNL142**

**80 pcs - METRIC**

The most common metric taper grease fittings.

**Includes**

- M6 x 1 Straight, Qty = 20
- M6 x 1 90° Angle, Qty = 10
- M10 x 1 Straight, Qty = 15
- M8 x 1 Straight, Qty = 15
- M8 x 1 90° Angle, Qty = 10
- M10 x 1 90° Angle, Qty = 10



**LNL143**

**BEST SELLER**

**COMPLETE GREASE FITTING REPLACEMENT KIT**

The most common SAE and metric taper fittings. 80 fittings total.


- Two multi-tools allow easy removal and installation of all sizes of grease fitting, even if broken.
- 20 plastic caps keep grease fittings clean and help them last longer.

**Includes**

- Straight grease fittings in four sizes (10 each): 1/8" NPT, 1/4"-28 SAE-LT, 6x1 metric, 8x1 metric
- 90 degree SAE fittings (5 each): 1/8" NPT, 1/4"-28 SAE-LT
- 4-way tools (small and large) to replace fittings, remove broken fittings and retap stripped holes
- 20 fittings caps. 10 each in yellow and red

**GREASE FITTING THREAD TESTER**

- Easily identify thread patterns for all common standard and Metric grease fittings
- Made of aluminum

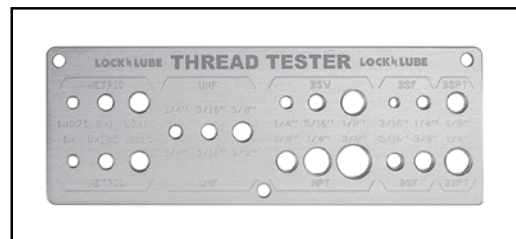

**LNL132**



**LNL220**

**MAGNETIC GREASE FITTING RELOCATION BLOCK**

- Replace any fitting with an adapter that includes a female 1/8" NPT end
- Use a grease hose to connect the adapter to the locking swivel on the header block
- Attach the header block to your machine using the powerful magnet on the back
- Easily grease one or two fittings using the Zerks installed in the header block
- For best connection, use LockNLube Whip Hoses p 17



**LNL133**

**HEAVY-DUTY GREASE GUN HOLDER**

- Can be mounted to walls, machinery, or heavy equipmen.
- Industrial strength. Designed to retain your grease gun in high vibration environments
- Clamps on all standard 14 oz. grease gun barrel.

**BEST SELLER**

**Clip Bender®**



**CB001**

The Clip Bender® is a hand tool used for securing T-Post fence clips. It is made in the USA of 100% steel with a black oxide coating to prevent rust. The comfortable rubber handle is bright yellow for greater visibility. With it's durability and unique design the Clip Bender® is without a doubt the best tool for the job.

**GALVANIZED T-POST FENCE CLIPS**

- Made in the USA from heavy gauge 14.5 galvanized steel wire.
- For attaching non-electrified wire to T-Posts.
- Fit standard size 1.25 and 1.33 lb. studded T-posts.
- Best when installed with a Clip Bender tool.



**WW15 & WW20**

**WAND WIZARD**

Quickly change the spray angle on your pressure washer wand! Straight across to straight down, and everything in between. Offered in Quick Connect (WW15) and 1/4" NPT (WW20) Models.



**CBC-50**



**BARREL CAPS**

**GREASE GUN BARREL CAPS**

- The Grease Gun Barrel Cap, a.k.a. Grease Gundo, is Compatible with any standard 14 oz. grease gun (manual, cordless, pneumatic), it stop drips and leaks with a high-quality nitrile rubber cap. Also includes matching coupler cap
- Available in six colors
- Use different colors to identify the grease in multiple grease guns

<b>LNL161</b>	Yellow
<b>LNL162</b>	Orange
<b>LNL163</b>	Red
<b>LNL164</b>	Blue
<b>LNL165</b>	Green
<b>LNL166</b>	Black



**LNL134**



**LNL137**

**GREASE FITTING CAPS**

- Keeps standard SAE and Metric grease fittings clean of dirt and dust.
- 50 in a pack



**LNL124**

- Easily install and extract grease fittings
- Fits 1/4"-28, M6x1, M8x1 and other fittings with hex size 5/16" (7mm) and 3/8" (9mm)



**LNL125**

- Easily install and extract grease fittings
- Fits 1/8" NPT, BSPT, M10x1 and other fittings with hex size 3/8" (9mm) and 7/16" (11mm)



**DOUBLE ACTION TRANSFER PUMP**

Transfer fluids easily with no mess or spills!

- Rugged aluminum die-cast head
- Steel barrel in premium powder-coated finish with heavy-duty rubber plunger
- 'V' type drop-resistant plunger handle
- Complete with 8' of vinyl hose (4' with each valve)

Intake and output hoses are both 4' long and of 2 different sizes

- Intake (narrower): ID 10mm - OD 15mm
- Output (wider) ID 15mm - OD 20mm

**LNL159**



**LOCKN LUBE UNIVERSAL BEARING PACKER**

Universal Bearing Packer with threaded center post. The design incorporates a standard grease fitting at one end, which easily connects to any grease gun coupler. Heavy duty, all-metal construction.

- Quickly flushes out old grease and repacks bearings
- Fast, efficient, and thorough
- Cone diameter is 4 1/2
- Suited for bearings with a min. inner diameter of 1/2" (12 mm), to a max. outer diameter of 5" (125 mm) and height from 1/4" (6 mm) to 2" (50 mm)

**LNL145**



**4-IN-1 GREASE INJECTION GUN KIT**

Our precision machined injection grease gun builds up to 2,000 PSI, won't leak from the push button and can be used to grease Zerk fittings, slides, bearings, or other situations that require a fine or precise grease application.

The Full Kit Includes:

- Two (2) Tips: Brass precise applicator for a fine line of grease. Zerk fitting applicator for greasing Zerk fittings.
- Four (4) loading options: bulk grease reservoir, standard lipped (paper) cartridges, threaded grease cartridges, screw-on tubes (9/16 UNF thread).

**LNL253**

**IN-STORE PROMOTIONAL MATERIALS**

**PROMOTION**



**IN-STORE DISPLAY UNIT**  
Updated design includes removable legs and hang holes for use on pegboard or countertop

**Display Includes:**


- 1 - Display board with two removable legs
- 2 - display hooks, required hardware
- 1 - 12" grease hose
- 1 - In-line hose swivel (LNL231), and
- 1 - LockNLube Grease Coupler (GC81011)

**A \$70 Value—Your Cost: \$20**

*Packaged couplers sold separately*



**GC81034**



**LNL940**

**CUSTOM DEALER BANNER**

Promote your LockNLube products with this heavy-duty vinyl banner, custom printed with your Company Name on it.

- 48" W x 36" H
- Sturdy 13oz. Vinyl
- Grommets for easy hanging



**LNL920-Y**

**LOCKNLUBE TSHIRTS**

**YOUR BEARINGS WILL THANK YOU.** Safety Green works on the job site and anywhere else you choose to wear it. Let the world know that you're fed up with greasing frustration. Sizes per your specifications.

Call us to set up an order. 250-739-0960

# LOCK LUBE®



## COAST LUBRICANTS & INDUSTRIAL SUPPLY

612 Chestnut Street, Nanaimo, BC, Canada V9S 2L2  
Phone: 250-739-0960 Email: [sales@coastlubricants.com](mailto:sales@coastlubricants.com) Web: [www.coastlubricants.com](http://www.coastlubricants.com)