


# TEC PLEX<sup>®</sup>

**2460M5** HEAT, WATER & CORROSION RESISTANT  
EXTREME INDUSTRIAL GREASE

## GENERAL PURPOSE SERIES

**TEC PLEX<sup>®</sup> 2460M5** is a calcium sulfonate grease fortified with 5% molybdenum disulfide, developed specifically for use in the most extreme Steel Mill applications. The product is formulated to withstand intense heat while providing excellent protection from extreme pressures of working with heavy loads in steel processing. The addition of the moly-based solid lubricant provides an extra layer of protection for equipment that can be prone to seizing due to rapid temperature changes (ladles) or extreme pressures (coiler mandrels).

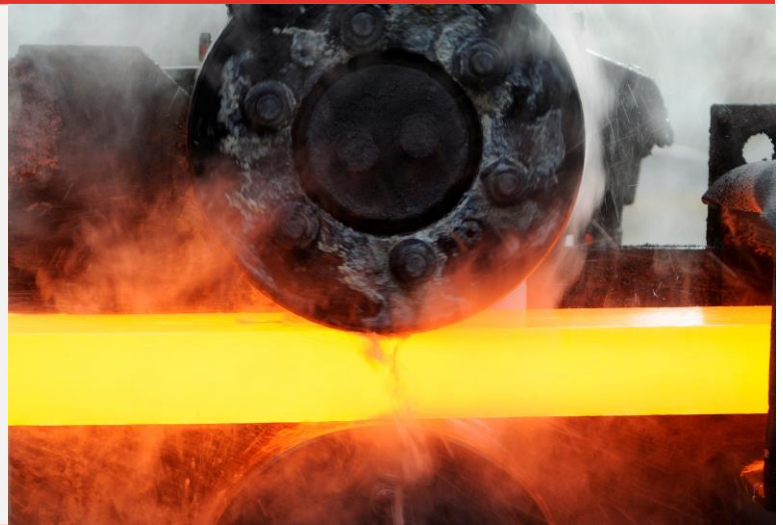


## TYPICAL APPLICATIONS

- Ladle Turrets
- Coiler Mandrels

## KEY FEATURES

- Grade 2, ISO 460 Formulation.
- Moly-fortified formulation = Maximum protection from extreme pressures resulting from shock loads
- Superior protection from rust and corrosion
- Excellent resistance to water washout
- Outstanding high-temperature properties
- Environmentally friendly since the formulation contains no antimony, barium, chlorine, phosphorus, zinc or free sulfur

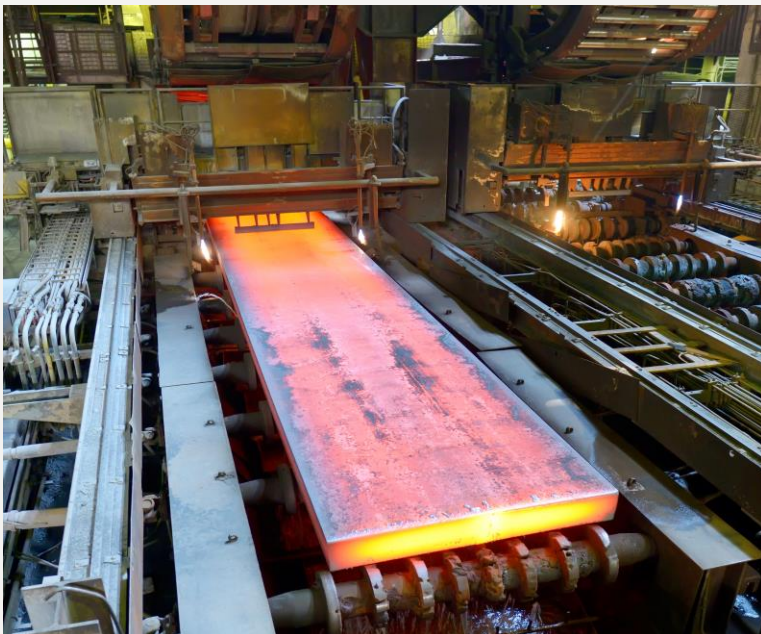

 **COAST LUBRICANTS  
& INDUSTRIAL SUPPLY**

# TEC PLEX<sup>®</sup>

## 2460M5 HEAT, WATER & CORROSION RESISTANT EXTREME INDUSTRIAL GREASE

### GENERAL PURPOSE SERIES

#### PHYSICAL PROPERTIES

#### TEST METHOD

#### TYPICAL VALUES

NLGI Grade	ASTM D217	2
Color	Visual	Gray
Texture	Visual	Smooth
Dropping Point, °C	ASTM D2265	316°C +
Worked Penetration, 60 Double Strokes, dmm	ASTM D217	265 - 295
Mechanical Stability		
<i>Worked Penetration 10,000 Double Strokes,</i>	ASTM D217	
<i>% Change</i>		< 3.0
<i>Worked Penetration 10,000 Double Strokes 10% Water,</i>	ASTM D217	
<i>% Change</i>		< 3.0
Roll Stability, % change	ASTM D1831	< 3.0
Timken OK Load, kg	ASTM D2509	27.2
4-Ball EP: LWI, kgf	ASTM D2596	60
Weld Point, kg	ASTM D2596	500
4-Ball Wear, mm	ASTM D2266	0.60
Fretting Wear, mg	ASTM D4170	<10.0 mg
Bearing Rust Protection	ASTM D1743	Pass
Salt Fog Corrosion, 1 mil d.f.t., hours	ASTM B117	>500
Wheel Bearing Leakage, grams	ASTM D4290	< 3
Bearing Life Performance, hours	ASTM D3527	100+
Bomb Oxidation, 100 hours @ 99°C, PSI Drop	ASTM D942	< 1
Water Washout, % removed	ASTM D1264	< 1
Water Spray Off, % removed	ASTM D4049	10.4
Oil Separation, % loss	ASTM D1742	<0.5
Copper Strip Corrosion	ASTM D4048	1b
Elastomer Compatibility	ASTM D4289	
AMS 3217 / 3B CR Type 70 hours @ 100°C		
Percent Swell		+6.6
Hardness Change, Durometer A points		-3.5
AMS 3217 / 2B NBR-L Type 70 hours @ 150°C		
Percent Swell		+1.8
Hardness Change, Durometer A points		-1.3
Base Oil Viscosity, cSt	ASTM D445	
@ 100°C		30.6
@ 40°C		460
Viscosity Index		97.5
Emcor Corrosion, 3% NaCl	ASTM D6138	2,2

#### REFER TO MATERIAL SAFETY DATA SHEET FOR HEALTH AND SAFETY INFORMATION.

WARRANTY: Coast Lubricants and Industrial Supply warrants all products manufactured by it to be free from defects in material and workmanship. COAST LUBRICANTS AND INDUSTRIAL SUPPLY MAKES NO OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, WITH RESPECT TO SUCH PRODUCTS, AND ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND IMPLIED WARRANTIES ARISING FROM A COURSE OF DEALING OR USAGE OF TRADE, ARE DISCLAIMED BY COAST LUBRICANTS AND INDUSTRIAL SUPPLY. All claims hereunder must be made in writing within 30 days after receipt of the products at the buyer's plant and prior to further processing the products or combining them with other materials or products. Coast Lubricants and Industrial Supply's liability, whether under this warranty or in contract, tort, negligence or otherwise, is limited to the return of the net purchase price paid for any products proven defective or, at Daubert's option, to the repair or replacement of said products upon their return, transportation prepaid, to Coast Lubricants and Industrial Supply. THE REMEDY HEREBY PROVIDED SHALL BE THE EXCLUSIVE AND SOLE REMEDY OF THE BUYER, AND UNDER NO CIRCUMSTANCES SHALL COAST LUBRICANTS AND INDUSTRIAL SUPPLY BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES. No Coast Lubricants and Industrial Supply representative or other person is authorized to change this warranty in any way or to assume for Coast Lubricants and Industrial Supply any other liability in connection with the sale or use of its products.

CAUTION: The data, statements and recommendations set forth in this product information sheet are based on testing, research and other development work which has been carefully conducted by us, and we believe such data, statements and recommendations will serve as reliable guidelines. However, this product is subject to numerous uses under varying conditions over which we have no control, and accordingly, we do NOT warrant that this product is suitable for any particular use. Users are advised to test the product in advance to make certain it is suitable for their particular production conditions and particular use or uses.



612 Chestnut Street, Nanaimo, BC, Canada V9S 2L2  
Phone: 250-739-0960 Email: sales@coastlubricants.com Web: www.coastlubricants.com